



Residential



Voice & 4G LTE



Multiple users



All carriers

EZ 4G™

Five-band Home Cellular Signal Booster

SureCall EZ 4G

Five-band Home Cellular Signal Booster

Overview

SureCall's EZ 4G is a revolutionary plug and play cell phone signal booster that does not require an outdoor antenna. The attractively designed EZ 4G incorporates SureCall's award-winning, patented all-carrier technology to deliver enhanced indoor cell phone signal coverage for clearer and more reliable voice and data performance.


Features and Benefits

- First all-carrier voice and 4G LTE signal booster that doesn't require the installation of a roof-top antenna
- Installation in as little as 15 minutes
- Typically covers 1-2 rooms (up to 2,000 sq. ft.) with weak reception at window where unit is placed (coverage increases with stronger signal)
- Supports multiple users simultaneously
- Backed by industry leading 3 year manufacturer's warranty

Booster Kit Includes:

The EZ 4G Kit (SC-PolyEZ-DT-72-Kit) includes: the EZ booster with built-in outdoor antenna, power supply, coax cable and an indoor desktop antenna.

Installation Example

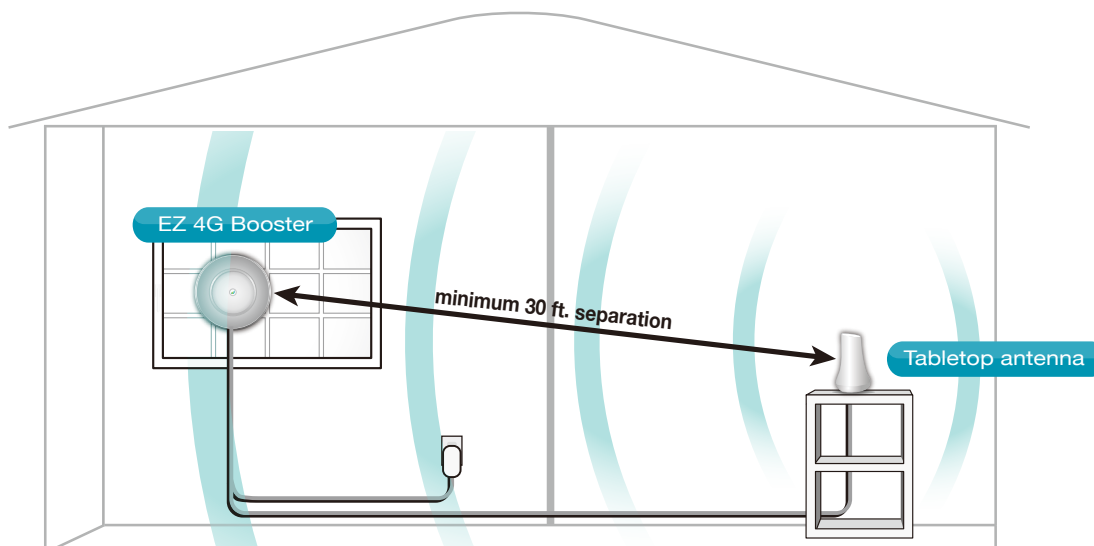

Key Features:

- Uplink becomes dormant when not in use, providing green, power saving operation
- Auto Gain Control (AGC) for carrier-friendly operation
- Supports all Voice and 4G LTE standards
- Patent #8,867,572 and patent pending



EZ 4G™

Five-band Home Cellular Signal Booster

Specifications

| Model No. | EZ 4G |
|---------------------------------|---|
| Uplink Frequency Range (MHz): | 698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755 |
| Downlink Frequency Range (MHz): | 728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 |
| Supported Standards: | CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards |
| Input/Output Impedance: | 50 ohm / 75 ohm |
| Maximum Gain: | 72 dB |
| Noise Figure: | 7 dB |
| VSWR: | ≤2.0 |
| AC Input: | 110V, 50/60 Hz |
| Maximum Output Power: | 1 Watt EIRP |
| Cable: | RG6 (50 feet) |
| RF Connectors: | Donor port: Integral, Server port: F Female |
| Power Consumption: | <10W |
| Dimensions: | 13 in. Diameter |
| Weight: | 3 lb. 2 oz. |
| Coverage: | 1-2 Rooms (up to 2,000 sq. ft.) |

Specifications are subject to change. Specifications contained within apply only to products meeting the latest FCC Certification Guidelines.